

Test Conformity

This test conformity is issued under the sole responsibility of the manufacturer:

TST Sweden AB

Segloravägen 22

504 64 Borås

Sweden

+46 (0)320 20 58 80

info@tst-sweden.se

Object of the test conformity:

Hose Connection Cover Ø61 mm

ART. NO: 5071000 5910

Report number: TU013-2024-TST1.1

Date:2024-09-03

SPIR STAR

Country: Germany

Test protocol:

Burst pressure test of TST hose protection/ shroud

Inner diameter 61mm

with high pressure hose ID 8mm and burst pressure >3000ba

1. Test Specimen

Hose Type: 8/2W TEST 1.1

Inner diameter hose: 7,90mm

Free-hose Length: 265 mm

TST Hose protection Length: 400 mm

TST Hose protection Inner diameter: 61 mm

TST Hose protection Nr. 5071000 5910

2. Test Equipment List

Test equipment : Burst Pressure Test stand

Test unit no. TU013

Pressure Sensor #346 (SN164510384)

3. Test Conditions

min. Target Burst Pressure: 3000bar

Installed position: straight

Quantity of sample: 1

Test Temperature: ambient

Medium: Special Medium for high pressure testing

4. Test Result

Hose type 8/2W reached a burst pressure of 3312 bar.

We could not find any damages on the inside or outside of the TST hose protection/shroud after burst test




SAVING LIVES

5. Annex



Picture 1: installed hose sample with TST hose/protection shroud

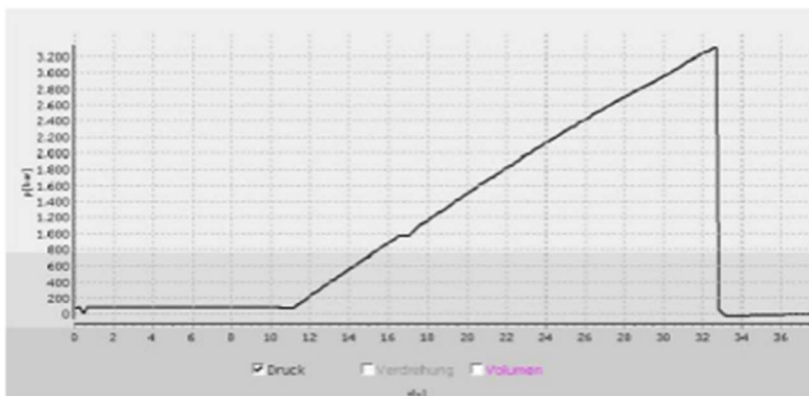

Picture 2: Pressure curve of burst test



SAVING LIVES



Picture 3: bursted High Pressure Hose with TST hose protection/ shroud, no damage visible.

Signed for and on behalf of TST-Sweden AB.

Borås, Sweden, 2025-10-28

Catrin Tammjärv
R&D Manager
TST Sweden AB